

SIMONSWERK

VARIANT® VN

MULTI 2D VN 5133

for Schröder fire and smoke resistant doors

hinge

Technical details

load capacity	100,0 kg
knuckle length	100,0 mm
knuckle diameter	20,0 mm

descriptive text

SIMONSWERK MULTI 2D VN 5133 door hinge for System Schröders, with unrebated steel doors with overlap thickness of 7 mm. CE-certified, load capacity 100 kg, knuckle length 100 mm, knuckle diameter 20 mm, right hand and left hand applicable. Two-dimensionally, continuously adjustable: Side +/- 3,0 mm, height +/- 3,0 mm. Finish...

Note

The load capacity mentioned above refers to the use of 2 hinges per door leaf (1 x 2 m).

Also available with security pin (MSTS).

Product features

- for unrebated steel doors
- for overlap thicknesses 7 mm
- continuously 2D adjustable (side +/- 3,0 mm, height +/- 3,0 mm)

Functional areas


fire resistance, smoke resistance

Quality marks




Items (DIN reference: DIN right and left hand)

finish(es)	galvanised 010
packing unit	pack of 20
item number	5 030844 0 01007
finish(es)	satin brushed stainless steel 040
packing unit	pack of 20
item number	5 030844 0 04007

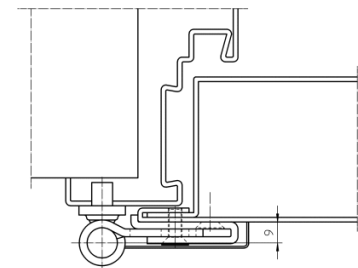

steel door

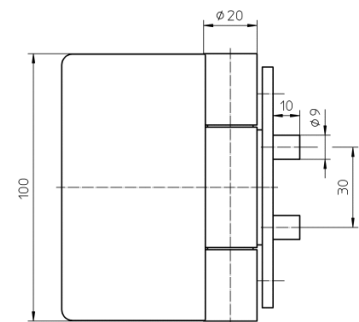

front view