Planet RH for wavy floors

For 1 and double-wing / folding doors made of wood, plastic and metal plus sliding doors, accordion walls and front doors as well

Main features

- lift height 20 mm, seal height up to 25 mm
- for wavy, buckled, hollow, bevelled and uneven floors
- soft sililcone bevel lip seal
- fits on the floor
- compensation of 15 mm in case of sloping floor at door width of 1000 mm
- for acoustic- and light protection
- unilateral release with parallel drop-down
- even for double-wing folding doors with flush bolt or driving bar
- acoustic insulation up to 42 dB in case of an optimal sealing
- can be shortened up to the next shorter length on stock
- warranty 7 years


Executions

- Planet RH RD/42 dB, smoke-shielding
- Planet RH FH+RD/42dB, fire-retardant and smoke-shielding
- fire-retardant
- sliding doors
 accordion walls
- installation on the top
- swing doors
- special executions on request

Double-wing / folding doors

- refer to chapter Flush bolt | Drill hole
- DIN L | DIN R



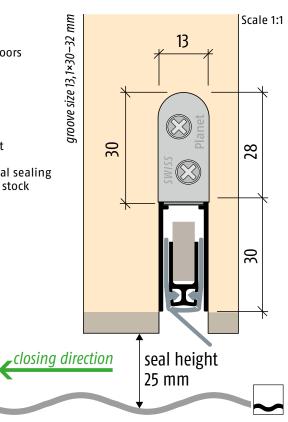

Advertising text

Planet RH RD/42dB, smoke-shielding 🛛 🖾

Automatic door drop-down seal **Planet RH RD/42dB**, especially **for wavy floors**, for sound protection and smoke-shielding doors, release on hinge side, fits on the uneven floor, seal lift height up to 25 mm, flush or deeper grooved in for lip protection, lateral fastening. Aluminum profile 13×30 mm.

Planet RH FH+RD/42dB, fire-retardant and smoke-shielding 🛛 🔽 🔍

Automatic door drop-down seal **Planet RH FH/RD/42dB**, especially **for wavy floors**, for sound protection-, smoke-shielding- and fire-retardant doors, release on hinge side, fits on the uneven floor, seal lift height up to 25 mm, flush or deeper grooved in for lip protection Lateral fastening. Aluminum profile 13×30 mm.

Technical specifications

Profile material:	aluminum 13×30 mm
Groove size:	13,1 mm wide and 30 up to 32 mm deep
Seal profile:	high-grade silicone or high-grade self-extinguishing silicone
Seal height/lift height:	up to 25 mm
Sound absorption value:	42 dB
Lift height adjustment:	on the release knob with an Allen key 3 mm
Lengths in stock:	335, 460, 585, 710, 835, 960, 1085, 1210, 1335, 1460 mm
Special lengths:	on request up to 6000 mm for wing- and sliding doors
Release:	unilaterally on hinge side
can be shortened:	up to the maximum of 125 mm (335 mm only 115 mm)
Fastening:	at the side with stainless angle brackets and screws
Stopping plate:	stainless, to drive home, 20×20 mm
Test approvals:	on request




For 1 and double-wing / folding doors made of wood, plastic and metal plus sliding doors, accordion walls and front doors as well

Order specification

- Planet RH RD/42dB, incl. assemly set HS Part number 88 xxx*
- Planet RH FH+RD/42dB, incl. assemly set HS Part number 85 xxx*
- Planet RH sliding door, incl. assemly set HS Part number 89 xxx*

DIN R or DIN L

*xxx = refer to price list for profile length



DIN R





Planet RH profile




Planet RH with retaining bracket, release side

Accessories / options

- Planet installation set HS, including 2 retaining brackets, stainless, 4 screws and stopping plate, type 1, Part number 900 180
- Planet stopping plate type 1, stainless Part number 900 014
- Cut the Planet to fix dimension Part number 900 200
- Drill hole 5×13 mm including plastic guide for Planet TR | KR Part number 900 190 for order specifications refer to chapter Flush bolt | Drill hole
- Planet BM floor recess plates refer to chapter BM





Planet KR flush bolt, incl. strike plate, refer to chapter Flush bolt Drill hole. Option: floor recess plate 5×13 mm, narrow



Option: Planet RH with Planet Drill hole 5×13 mm

SWISS MADE

Planet GDZ AG Neustadtstrasse 2 P.O. Box CH-8317 Tagelswangen Phone +41 (0) 43 266 22 22 Fax +41 (0) 43 266 22 23 mail@planet.ag www.planet.ag



2.2.4