

For 1 and double-wing / folding doors made of wood, plastic and metal plus sliding doors, accordion- and partition walls as well, refer also to chapter sliding doors Planet SL

## Main features


- lift height 20 mm
- unilateral release with parallel drop-down
- does not trail on the floor
- automatic compensation to inclined floors
- only one groove width for any requirements
- for double-wing / folding doors with flush bolt or driving bar
- even for lateral assembly (refer to chapter Socle)
- high-grade silicone lip, simple lift height adjustment
- warranty 7 years

## Executions

- Planet FT RD/48dB, smoke shielding
- Planet FT FH+RD/48dB, fire-retardant and smoke-shielding
- sliding doors
- lip extended by 8 mm
- accordion walls
- installation at the top
- swing doors
- special versions on request

## Double-wing / folding doors

- refer to chapter Flush bolt | Drill hole

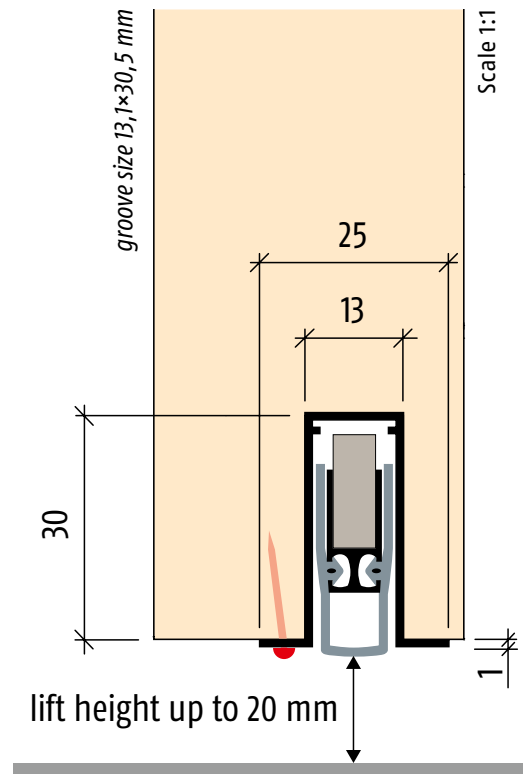

## Advertising text

### Planet FT RD/48dB, smoke-shielding

Automatic door drop-down seal **Planet FT RD/48dB**, for sound protection- and smoke-shielding doors, release on hinge side with automatic compensation in case of an inclined floor, parallel drop-down, seal lift height up to 20 mm, flush to put in groove. Silicone lip, fastening from the bottom, aluminum profile 13×30 mm.

### Planet FT FH+RD/48dB, fire-retardant and smoke-shielding

Automatic door drop-down seal **Planet FT FH/RD/48dB**, for sound protection-, smoke-shielding- and fire-retardant doors, release on hinge side with automatic compensation in case of an inclined floor, parallel drop-down, seal lift height up to 20 mm, flush to put in groove. Fastening from the bottom, self-extinguishing silicone lip, aluminum profile 13×30 mm.

## Technical specifications

Profile material:	aluminum, 13×30 mm
Groove size:	13,1×30,5 mm
Seal profile:	high-grade silicone or high-grade self-extinguishing silicone
Seal height/lift height:	up to 20 mm
Sound absorption value:	up to 48 dB at 7 mm space to the floor, up to 42 dB at 20 mm
Lift height adjustment:	on the release knob with an Allen key 3 mm
Length in stock:	350, 450, 550, 650, 750, 850, 950, 1050, 1150, 1250, 1350, 1450 mm
Special length:	on request up to 6000 mm, sliding doors up to 6000 mm
Release:	unilaterally on hinge side
can be shortened:	up to the maximum of 100 mm
Fastening:	from the bottom with screws or nails / pins available by customer
Stopping plate:	stainless, to drive home, 20×20 mm
Test approvals:	on request

For 1 and double-wing / folding doors made of wood, plastic and metal plus sliding doors, accordion- and partition walls as well, refer also to chapter sliding doors Planet SL

## Order specification

- Planet FT RD/48dB, including stopping plate, type 1, Part number 70 xxx\*
- Planet FT FH+RD/48dB, including stopping plate, type 1, Part number 71 xxx\*
- Planet FT sliding door, including stopping plate, type 1, Part number 72 xxx\*

\*xxx = refer to price list for profile length

## Accessories / options

- Planet Stopping plate type 1, stainless type 2 or type 3 (refer to Accessories)
- Cut the Planet to fix dimension Part number 900 200
- Planet covering plates Part number 700 10
- Drill hole 5×13 mm including plastic guide for Planet TR | KR Part number 900 190 for order specifications refer to chapter Flush bolt | Drill hole
- Planet Soble for attached assembly refer to chapter Soble
- Planet BM floor recess plates refer to chapter BM



Planet FT profile



Planet FT, release side



Planet Stopping plate type 1, stainless



**Option:**  
Planet FT with Planet Drill hole 5×13 mm



**Option:**  
Planet FT+8, release side



**Option:**  
Planet Soble without covering cap with Planet FT. Refer to chapter Planet Soble



Planet KR flush bolt, incl. strike plate, refer to chapter Flush bolt | Drill hole.  
**Option:** floor recess plate 5×13 mm, narrow

SWISS MADE